

SMP™ SG-4250 substation gateway



General

The SMP™ SG-4250 substation gateway from Eaton's Cooper Power Systems leverages more than 20 years of hardware and software development and delivers one of the most advanced substation automation solutions on the market. With its robust, flexible and scalable design, the SMP SG-4250 substation gateway is an evolving solution that adapts to new market requirements.

- Get the most flexible integration platform with up to 10 Ethernet ports and 32 serial ports
- Leverage best in the industry processing power to implement the most demanding projects
- Protect your investments by integrating your legacy equipment with newest technologies including IEC 61850
- Avoid getting trapped in a single vendor solution with a truly interoperable platform
- Strengthen Cyber-Security with secured SCADA protocols, encryption, and certificate based authentication
- Comply with NERC/CIP requirements; don't let security slow you down
- Get the most of your system using built-in alarm management system and advanced HMIs
- Add intelligent control using the built-in IEC 61131-5 compliant Soft PLC engine
- Retrieve and manage non-operational data such as fault records and Digital Fault Recorder (DFR) files
- Rely on a robust substation-grade platform with advanced redundancy features

Features

SMP Gateways are rugged, reliable, and tailored to our customer's requirements. They are easy to setup and use. Thousands of SMP Gateways have been installed worldwide. Eaton's Cooper Power Systems has decades of experience in substation gateway design, making our SMP product line one that utilities can rely on.

Following are a listing of the general features, protocols, and security features offered in the SMP SG-4250 substation gateway.

Table 1. Features

General Features	Supported Protocols	Security Features
Data concentration	DNP3 with Secure Authentication v5	Integrated firewall
Protocol translation	IEC 61850, GOOSE	Secure maintenance connection (TLS)
NERC CIP compliant security	IEC 61400-25	Secure SCADA protocol (TLS)
Hardware and software redundancy	IEC 60870-5-101/103/104	AES-128/256 encryption
Modular- and field-upgradable hardware and software	SEL Fast Meter and ASCII	X.509 certificates
Up to 10 1Gb/s Ethernet ports	IEEE Std C37.118™-2005 standard synchrophasor	Passthrough access management
Ethernet NIC teaming	MODBUS	Account management:
Ethernet multihoming	Secure ICCP	Strong passwords
VLAN tag support	IEC 62056	User accounts and user groups
Integrated web server	AREVA Courier, K-BUS	Detailed group permissions
Automation functions	ABB Standard Ten Bytes, SPABus	Access management
IEC 61131 compatible SoftPLC (CoDeSys)	Algodue	Access attempts logs
	Beckwith	Account lock upon failed access attempts
Passthrough connections to IEDs	BlueTree	Retrievable access logs for auditing
IED event file retrieval	Conitel	Syslog support for remote log storage
Offline and template-driven configuration tool	Cooper Form 6	All system components digitally signed
Microsoft Windows®-based maintenance tools, including protocol analyzer	Cooper 2179	Continuous file monitoring for system integrity
Commissioning tool with communication dashboard	FTP	Achilles certification
Local/remote HMI with single-line capabilities	GE (D20, EGD, SR, UR, Syprotec)	Nessus compliance
Alarm annunciator	Harris 5000/6000	
External communication radio support	Hathaway	
Integrated self-diagnostics	Mehta Tech	
Integrated watchdog timer	Morgan Schaffer (Calisto)	
Power supply monitoring	Motorola MDAC	
High-accuracy real-time clock (with battery backup)	Landis+Gyr (LG8979)	
	Opto 22 (Optomux)	
Internal clock synchronization using IRIG-B, IEEE Std 1588™-2008 standard, SNTP, or via protocols	OSIsoft PI server interface	
Device clock synchronization using IRIG-B (demodulated), IEEE Std 1588™-2008 standard, SNTP, or via protocols	RuggedCom	
Alarm contacts	Schneider Electric (ION)	
No moving parts	SES-92	
Panel mount ready	SDI-12	
	VALMET (TEJAS)	



Figure 1. SMP SG-4250 front panel

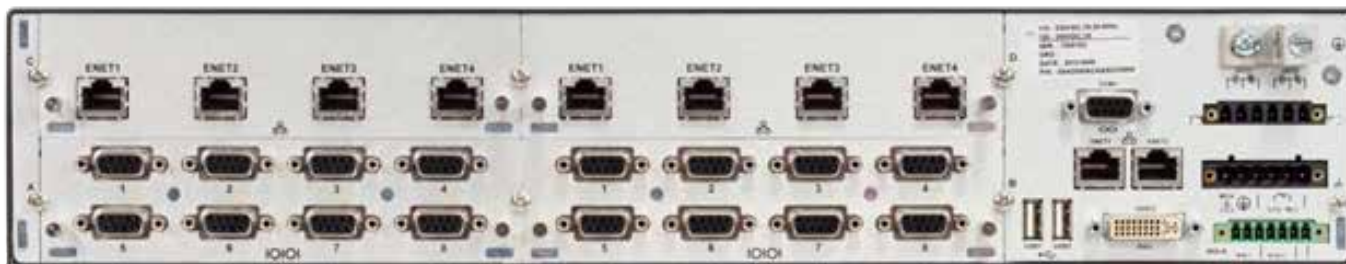


Figure 2. SMP SG-4250 rear panel

The SMP SG-4250 base unit includes:

- Intel CPU module
- Power supply
- Two (2) Ethernet ports
- One (1) serial port
- Three (3) USB ports
- One (1) DVI-I video port
- IRIG-B input/output
- Two (2) output relays

The SMP SG-4250 can be ordered with up to four (4) communication modules. The available modules are:

- Eight (8) asynchronous serial ports (RS-232, 2-wire RS-485, 4-wire RS-485)
- Four (4) Ethernet ports (10/100/1000BASE-TX)
- Four (4) fiber optic Ethernet ports with ST connectors (100BASE-FX)
- Four (4) fiber optic Ethernet ports with LC connectors (100BASE-FX)
- Four (4) universal ports with DB25 connectors (RS-232, 2-wire RS-485, 4-wire RS-485) and a BNC connector for modulated IRIG-B input

SMP SG-4250 modules configuration overview

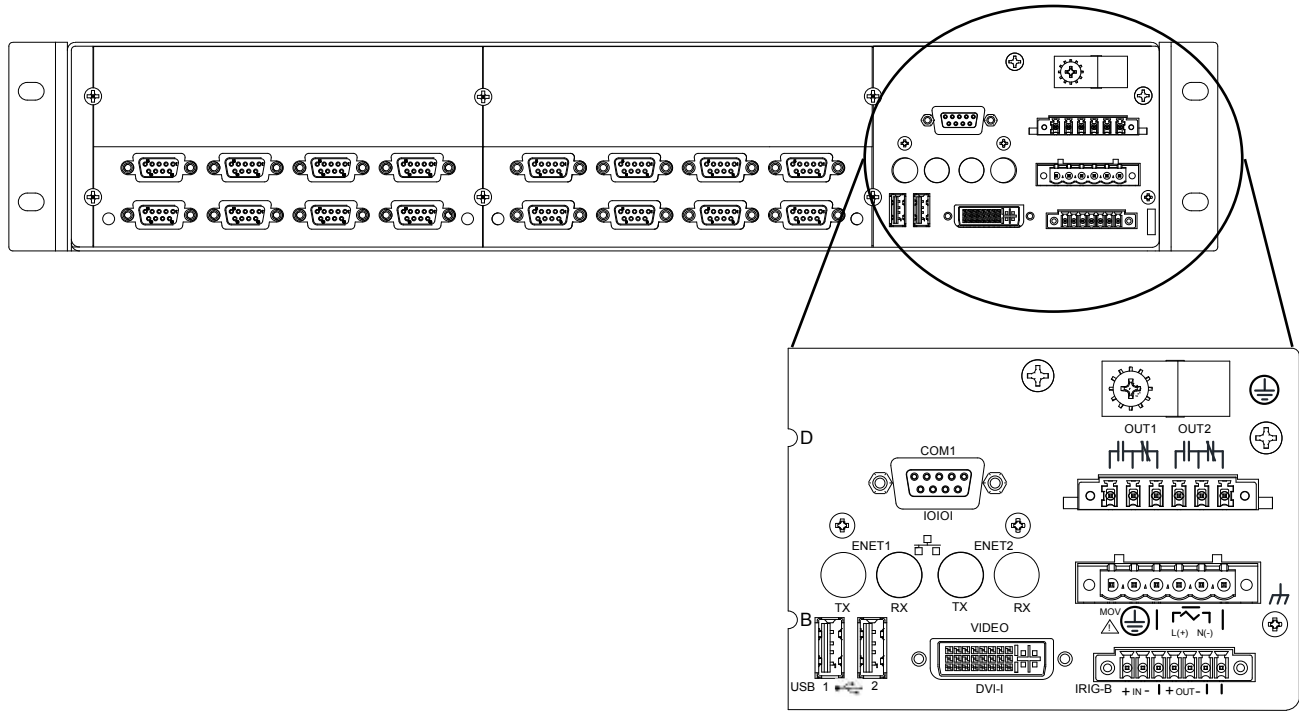


Figure 3. SMP SG-4250 base unit ports (optional fiber optic Ethernet is shown).

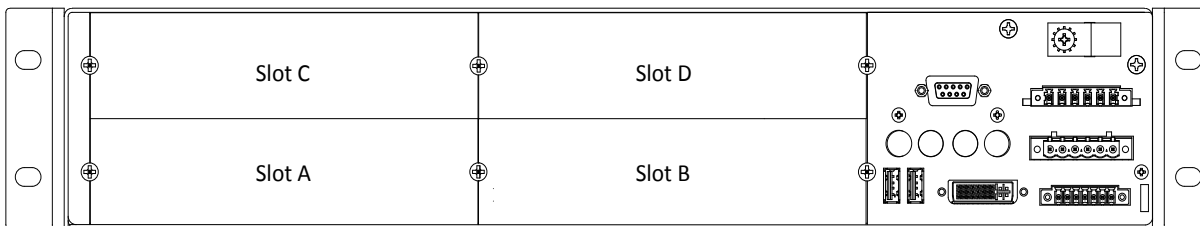


Figure 4. Available slots for communication modules.

The following table shows module availability for each slot.

Table 2. SMP SG-4250 Module Availability

Module	Serial	Ethernet (CU, ST or LC)	Universal Communication
Slot A	Option	No	Option
Slot B	Option	No	Option
Slot C	Option	Option	Option
Slot D	Option	Option	Option

SMP SG-4250 specifications

Table 3. General Specifications

Dimensions	Rack unit: 2U	
	3.3 in. H x 19 in. W x 12.875 in. L	
	8 mm H x 482 mm W x 327 mm L	
	(15 lbs max)	
Degrees of protection provided by enclosure	IEC 60529:IP30	
Warranty	5-year limited	
Operating temperature	-40 °C to 85 °C (-40 °F to 185 °F)	See Temperature Derating table.
	Not applicable for UL applications	
Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)	
Humidity	5 to 95%, non-condensing	
MTBF	Telcordia SR-332	8.74 years at 24 °C
Maximum altitude	2000 m	
Internal temperature sensor	High-temperature alarm	
Internal Battery	Lifetime: > 20 years	

Table 4. CPU

Processor Architecture	x86	
Operating System	Windows Embedded Compact 7.0	
Processor	Intel Atom Dual Core 1.8 GHz	

Table 5. Memory

RAM	2 GB (DDR2)	
Storage	1 GB Compact Flash	For OS, application and user data
Additional storage options	8 GB Compact Flash	For user data
	32 GB Compact Flash	
	32 GB Solid-State Drive	
	64 GB Solid-State Drive	
	128 GB Solid-State Drive	

Table 6. Power Supply Options
Low Voltage

Rated supply voltage	24 – 48 Vdc	As per IEC 60870-2-1 (DC3)
Input voltage range	19 – 56 Vdc	
Inrush current	48 A at 24 Vdc (t=1.5 ms)	
	95 A at 48 Vdc (t=1.5 ms)	
Power consumption	High end series: 35 W to 75 W	

High Voltage

Rated supply voltage	110-230 Vac / 125-250 Vdc	As per IEC 60870-2-1 (AC3 / DC3)
Input voltage range	88-264 Vac / 100-287.5 Vdc	
Frequency range	50/60 Hz	
Inrush current	38.9 A at 120 Vac (t=1.5 ms)	
	78.3 A at 240 Vac (t=1.5 ms)	
	28.6 A at 125 Vdc (t=1.5 ms)	
Power consumption	High end series: 35 W to 75 W	

Table 7. Base Unit Communication Ports

2 Ethernet Ports	10/100/1000BASE-TX (standard)	RJ45 connectors
	or 100BASE-FX, Multimode 1300 (option)	ST or LC connectors available Class 1 laser product
1 Serial Port	For touchscreen connectivity or RS-232 communications	DB9 connector
	Up to 115200 b/s	TVS protection
3 USB 2.0 Ports	1 client port for maintenance	Type B connector (front panel)
	2 host ports for touchscreen/mouse/keyboard	Type A connector (rear panel)

Table 8. Time Synchronization

Demodulated IRIG-B	Via terminal block (back panel)	Isolated
Input	2 V high-level detection, Vin max up to 12 Vdc, Opto-isolated	Current sink at 5 V IRIG-B; 5 mA
	IEEE Std 1344™-1995 standard	Current sink at 10 V IRIG-B; 14 mA
	Accuracy: ± 1 µs	Input impedance = 850-1000Ω
Distribution	5 or 10V, software-configurable ("jumperless").	LoadMAX = 40 Ω for 10 V and 20 Ω for 5 V
	Accuracy: ± 1 µs	

Table 9. Video

DVI / VGA port	DVI-I connector, single display	VGA requires DVI-I to VGA adapter
----------------	---------------------------------	-----------------------------------

Table 10. Output Relays

2 Form C relays	Normally open and normally closed contacts	6A 250 Vac / 30 Vdc Resistive
	1st relay is available for system health monitoring	3A 250 Vac inductive (PF = 0.4)
	2nd relay is available for system applications and can be activated through a system data point	2500 Vac Dielectric, MOV-protected between contacts

Table 11. Communication Modules

Metallic Ethernet ports	4 ports 10/100/1000BASE-TX	RJ45 connectors
	IEEE Std 1588™-2008 standard hardware ready	
Fiber Optic Ethernet ports (ST)	4 ports 100BASE-FX	ST connectors
	Multimode 1300 nm	Class 1 laser product
	IEEE Std 1588™-2008 standard hardware ready	
Fiber Optic Ethernet ports (LC)	4 ports 100BASE-FX	LC connectors
	Multimode 1300 nm	Class 1 laser product
	IEEE Std 1588™-2008 standard hardware ready	
Asynchronous Serial Ports	8 ports	DB9 connectors
	RS-232, 2-wire RS-485, 4-wire RS-485	Data rate up to 115200 bps
	Software configurable	
	Demodulated IRIG-B distribution	5 V or 10 V
	5 Vdc Power supply	250 mA max. per port, 350 mA max. per module
Universal module		
4 universal ports	Software configurable	DB25 connectors
	RS-232, 2-wire RS-485, 4-wire RS-485 and synchronous communications	Data rate up to 115200 bps
	Demodulated IRIG-B distribution	5 or 10 V
	Configurable 1-PPS output	
	5 Vdc power supply	250 mA max. per port 1 A max. per module
Modulated IRIG-B input	High state ≤ 16 Vpp	High-impedance BNC connector
	Low state ≥ 0.8 Vpp	Input impedance = 9 k Ω
	Accuracy: ± 1 ms	

Table 12. Certification

cTUVus	IEC 61010-1 ed 3.0 (2010-06, CAN/CSA-C22.2 No 61010-1-12 and ANSI/UL 61010-1-2012)	Coming Soon
RoHS	2002/95/EC	Coming Soon
WEEE	2012/19/EU	Coming Soon
REACH	Regulation (EC) No 1907/2006	Coming Soon
ISO : Equipment is designed and manufactured using ISO 9001 certified quality program		ISO 9001:2008 certificate of conformance was awarded by an independent certification authority. The corresponding certificate, quality manual and quality policy are available on demand.
Achilles Certification	Level 1	Coming Soon

Table 13. Compliance Type Test

CB Scheme Test Report	IEC 61010-1 ed3.0 (2010-06)	
	IEC 60950-1 ed 2.2 Consol. with am1&2	Coming Soon
CE Marking for Low Voltage Electrical Equipment	2006/95/EC	Coming Soon
Substation Grade	IEC 61850-3 ed1.0 (2002)	Compliant for command and control
		Climatic: Class C3 (3K7)
		Mechanical: Class Cm (3M6)
		Seismic: Class S3
	IEEE Std 1613™-2009 standard	Class 2
	IEEE Std 1613a™-2011 standard	

Substation grade compliance

The following certifications apply to the SMP SG-4250 substation gateway:

Table 14. Substation Grade Compliance

Certification	Notes
IEC 61850-3	The SMP SG-4250 was designed to be compliant with IEC 61850-3 for command and control in power stations, medium voltage substations, high voltage substations and other related protected areas, using local, field and protected signal port connections. The SMP SG-4250 complies with the following classes: Climatic: Class C3 (3K7) Mechanical: Class Cm (3M6) Seismic: Class S3
	SMP SG-4250 compliance with the IEC 61850-3 standard was validated by an independent testing laboratory. The compliance test reports are available on demand.
IEEE Std 1613™--2009 standard	The SMP SG-4250 was designed to be compliant with IEEE Std 1613™-2009 standard as Class 2 networking device for serial (RS-232, 4-wire RS-485 and 2-wire RS-485) and Ethernet communications (copper and fiber-optic).
	SMP SG-4250 compliance with the IEEE Std 1613™-2009 standard was validated by an independent testing laboratory. The compliance test reports are available on demand.

Type tests details

This section presents all tests that were conducted on the SMP SG-4250 platform.

Table 15. IEC 61850-3 (2002)

Electromagnetic Compatibility (EMC)		
Conducted Emissions	CISPR 22 (2008)	Class A
Radiated Emissions	CISPR 22 (2008)	Class A 30 MHz-6 GHz
Electrostatic Discharge Immunity	IEC 61000-4-2 (2008)	Contact: ± 6 kV Air: ± 8 kV
Radiated Electromagnetic Field Immunity	IEC 61000-4-3 (2006) A1 (2008) A2 (2010)	80 MHz-1 GHz: 20 V/m + 1 kHz 80%AM 1 GHz-3 GHz: 10 V/m + 1 kHz 80%AM Additional frequency: 5.15 Ghz-5.75 Ghz : 10 V/m + 1 kHz 80 %AM
Electrical Fast Transient Immunity	IEC 61000-4-4 (2012)	Power: ± 4 kV / 5 kHz and 100 kHz I/O Ports: ± 2 kV / 5 kHz Communication Ports: ± 2 kV / 5 kHz
Surge Immunity	IEC 61000-4-5 (2005)	110-230 Vac/125-250 Vdc supply: ± 2 kV (CM) / ± 1 kV (DM) * 24-48 Vdc Supply: ± 2 kV (CM) / ± 1 kV (DM) I/O Ports : ± 2 kV (CM) / ± 1 kV (DM) Communication Ports: ± 2 kV (CM) / ± 1 kV (DM) * Surge immunity on 110-230 Vac/125-250 Vdc supply can be increased to 4 kV (CM) / ± 2 kV (DM) by activating internal MOV. Refer to installation guide for more information.
Conducted Immunity	IEC 61000-4-6 (2008)	Power: 10 V _{rms} I/O Ports: 10 V _{rms} Communication Ports: 10 V _{rms}
Power Frequency Magnetic Field Immunity	IEC 61000-4-8 (2009)	Continuous Field: 100 A/m / 50 Hz & 60 Hz Short duration field: 1000 A/m / 50 Hz & 60 Hz
Damped Oscillatory Magnetic Field Immunity	IEC 61000-4-10 (1993) A1 (2000)	Field strength: 100 A/m Oscillation frequency: 100 kHz & 1 MHz
Voltage Dips, Short Interruptions and Voltage Variation Immunity	IEC 61000-4-11 (2004) IEC 61850-3 (2002)	Voltage dips: 70 % during 1 cycles 40 % during 50 cycles Short interruptions: 0 % during 10 ms 0 % during 5 cycle 0 % during 50 cycles
AC Supply variation Immunity	IEC 60870-2-1 (1995) IEC 61850-3 (2002)	Tolerance of nominal voltage: +15 % to -20 % (AC3) Tolerance of nominal frequency: +/- 5 % (F3)
DC Voltage Tolerance & Earthing Arrangments	IEC 60870-2-1 (1995) IEC 61850-3 (2002)	Tolerance of nominal voltage: +15 % to -20 % (DC3) Earthing Arrangements duration: 5 min
Conducted Common Mode Disturbances in the Frequency Range 0Hz-150kHz	IEC 61000-4-16 (1998) A1 (2001) A2 (2009)	Frequency: 50 Hz & 60 Hz Continuous: 30 V _{rms} / Dwell time: 10 sec Short duration: 300 V _{rms} / Dwell time: 1 sec
Ripple on DC Input Power Port Immunity	IEC 61000-4-17 (1999) A1 (2002) A2 (2009)	% of nominal DC voltage: 10 % Test duration: 10 min
Damped Oscillatory Wave Immunity	IEC 61000-4-18 (2006) A1 (2011)	Power: 2.5 kV CM / 1 kV DM f = 1 MHz Signal ports: 1 kV CM / 0.5 kV DM f = 1 MHz

Table 15. IEC 61850-3 (continued)

Voltage Dips, Short Interruptions and Voltage Variation on DC Power Port Immunity	IEC 61000-4-29 (2000)	<p>Voltage dips:</p> <p>40%Un during 100 ms*</p> <p>70%Un during 100 ms*</p> <p>Short interruptions:</p> <p>0% during 10 ms</p> <p>0% during 50 ms</p> <p>* Exception for 24-48 Vdc Power Supply operating at 24 Vdc:</p> <p>Voltage short interruptions:</p> <p>0% during 25 ms</p> <p>Voltage dips:</p> <p>40%Un during 25 ms</p> <p>70%Un during 20 ms</p>
Polarity Reversal	IEC 61850-3 (2002)	
Climatic Environment Conditions		
Dry heat	IEC 60068-2-2 (2007) Test Bd	85 °C, 16 h 5 warm boot
Cold	IEC 60068-2-1 (2007) Test Ad	-40 °C, 16 h 5 cold boot
Damp Heat, Steady State:	IEC 60068-2-78 (2012) Test Cab	40 °C, 93 %, 96 h
Damp Heat, Cyclic:	IEC 60068-2-30 (2005) Test Db	40 °C, 2 cycles, 95 %RH
Change of temperature	IEC 60068-2-14 (2009) Test Nb	-40 °C +25 °C, 2 cycles, 1 °C/min, t ¹ =3h
Mechanical Environmental Conditions		
Sinusoidal Vibration - Endurance	IEC 60068-2-6 (2007)	20 cycles, 2 g, 7,5 mm, 20 mm/s ² , 3 axes
Sinusoidal Vibration - Seismic	IEC 60255-21-3 (1993)	Class 2, method A
Shock-Bump	IEC 60068-2-27 (2008)	Semi-sinusoidal 300 m/s ² , 6 ms, Shocks by direction: 3, 3 axes Additional tests: 50 m/s ² , 5 g, 11 ms, 3 impulses, 3 axes 150 m/s ² , 15 g, 11 ms, 3 impulses, 3 axes 100 m/s ² , 10 g, 16 ms, 1000 impulses, 3 axes
Static Load	IEC 60870-2-2 (1996)	5 kPa, 1 min
Free Fall	IEC 60068-2-31 (2008)	1 m with packaging 25 cm without packaging

Table 16. IEEE Std 1613™-2009 Standard

Electromagnetic Compatibility (EMC)		
DC Rated Control Power Input	IEEE Std 1613™-2009 standard	Min: 80 %Un: 5 min Max: as per table 3: 5 min
AC Rated Control Power Input	IEEE Std 1613™-2009 standard	Min: 85 %Un: 5 min Max: 110 %: 5 min 85 % f min: 5 min 85 % f max: 5 min 100 % f min: 5 min 100 % f max: 5 min 115 % f max : 5 min 115 % f min : 5 min
Electrostatic Discharge Immunity	IEEE Std C37.90.3™-2011 standard	Contact: ±8 kV Air: ±15 kV Communication profiles: Heavy load, Typical load and idle.
Radiated Electromagnetic Field Immunity	IEEE Std C37.90.2™-2004 standard	80 MHz-1 GHz: 20 V/m + 80 %AM 80 MHz-1 GHz: 20 V/m + 100 %PM (1:2/200Hz) Spot frequencies according to Table 10 of the standard 900 Mhz : 20 V/m + 100 %PM (1:2/200 Hz)
SWC: Fast Transient Waveform	IEEE Std C37.90.1™-2002 standard	±4 kV / 2.5 kHz Communication profiles: Heavy load, Typical load and idle.
SWC : Oscillatory Waveform	IEEE Std C37.90.1™-2002 standard	2.5 kV CM /2.5 kV DM Oscillation frequency: 1 MHz Communication profiles: Heavy load, Typical load and idle.
Ripple on DC Input Power Port Immunity	IEEE Std 1613™-2009 standard	% of nominal DC voltage: 5 % Test duration: 10 min
Impulse Voltage Withstand Test	IEEE Std C37.90™-2007 standard	Power: ±5 kV I/O: ±5 kV Ethernet: ±2.5 kV
Dielectric Test	IEEE Std C37.90™-2007 standard	24-48 Vdc Supply @1000 Vdc 110-230 Vac/125-250 Vdc Supply @2000 Vac Output relays @2500 Vac Demodulated IRIG-B IN @2000 Vac RJ45 Ethernet @1500 Vac Modulated IRIG-B IN @2000 Vac
Climatic Environment Conditions		
Dry heat	IEC 60068-2-2 (2007) Test Bd	85 °C, 16 h 5 warm boot
Cold	IEC 60068-2-1 (2007) Test Ad	-40 °C, 16 h 5 cold boot
Damp Heat, Steady State:	IEC 60068-2-78 (2012) Test Cab	40 °C, 93%, 96 h
Damp Heat, Cyclic:	IEC 60068-2-30 (2005) Test Db	40 °C, 2 cycles, 95% RH
Mechanical Environmental Conditions		
Sinusoidal Vibration - Endurance	IEC 60068-2-6 (2007)	20 cycles, 2 g, 7,5 mm, 20 mm/s ² , 3 axes
Sinusoidal Vibration - Response	IEC 60068-2-6 (2007)	10-150 Hz, 0.5 g, 0,035 mm, 3 axes
Shock-Bump	IEC 60068-2-27 (2008)	Semi-sinusoidal 300 m/s ² , 6 ms, Shocks by direction: 3, 3 axes Additional tests: 50 m/s ² , 5 g, 11 ms, 3 impulsions, 3 axes 150 m/s ² , 15 g, 11 ms, 3 impulsions, 3 axes 100 m/s ² , 10 g, 16 ms, 1000 impulsions, 3 axes
Free Fall	IEC 60068-2-31 (2008)	1 m with packaging 25 cm without packaging

Temperature derating

The SMP SG-4250 can support operating temperatures between -40 °C and +85 °C per the IEC 60068-2-2 ed5.0 and IEC 60068-2-1 ed6.0 standards.

Note: The SMP SG-4250 meets the Dry Heat test requirements of 16 hours at 85 °C when equipped with CompactFlash disk storage (no SSD).

To be compliant with the IEC 61010-1 certification, the SMP SG-4250 can be used between the temperature range that is function of the total power consumption of the unit, as described by the tables below. If the SMP SG-4250 is equipped with fiber-optic LC connectors, the maximum operating temperature is the smallest value between the one provided by the second table or 60 °C.

Table 17. Temperature Derating-Power Consumption Evaluation

System Configuration		Power Consumption (W)	Power Consumption Evaluation (W)
SMP SG-4250 Substation Gateway (Basic Consumption)		23	23
Optional Features			
Memory Expansion	Solid State Drive (SSD) Expansion*	2	
Built-in Ethernet	2x Ethernet 10/100/1000BASE-TX Ports	4	
	2x Ethernet 100BASE-FX, Fiber Optic ST Connectors	5	
	2x Ethernet 100BASE-FX, Fiber Optic LC Connectors**	5	
Slot A	8x Serial RS-232/485 Ports (DB9)	3	
	4x Universal Communication Ports (DB25)	4.2	
Slot B	8x Serial RS-232/485 Ports (DB9)	3	
	4x Universal Communication Ports (DB25)	4.2	
Slot C	8x Serial RS-232/485 Ports (DB9)	3	
	4x Universal Communication Ports (DB25)	4.2	
	4x Ethernet 10/100/1000BASE-TX Ports	8	
	4x Ethernet 100BASE-FX, Fiber Optic ST Connectors	11.5	
	4x Ethernet 100BASE-FX, Fiber Optic LC Connectors**	11.5	
Slot D	8x Serial RS-232/485 Ports (DB9)	3	
	4x Universal Communication Ports (DB25)	4.2	
	4x Ethernet 10/100/1000BASE-TX Ports	8	
	4x Ethernet 100BASE-FX, Fiber Optic ST Connectors	11.5	
	4x Ethernet 100BASE-FX, Fiber Optic LC Connectors**	11.5	
		Total Power Consumption (W):	

* Maximum operating temperature with SSD storage is 70 °C.

** Maximum operating temperature with LC fiber optic Ethernet connector is 60 °C .

Table 18. Temperature Derating per Power Consumption Range

Total Power Consumption (W)	Normal Operating Temperature (°C)
< 40	70 °C
> 40 W to 50 W	65 °C
> 50 W to 65 W	55 °C

Dimension drawings

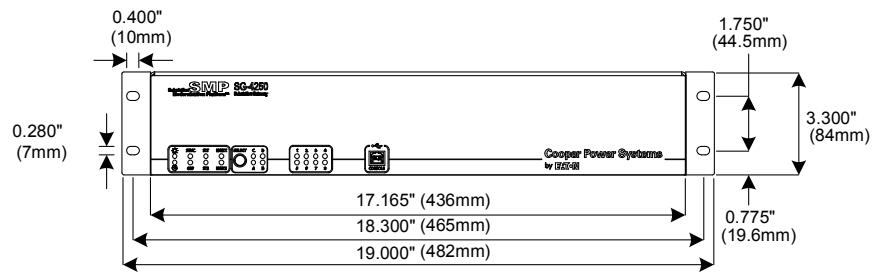


Figure 5. Front panel view.

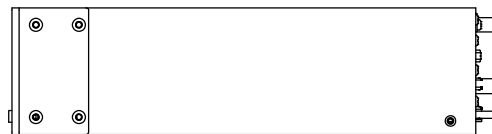


Figure 6. Side view.



Figure 7. Top view.

Table 19. System Configuration Chart

Description	SMP	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Family																	
SG4 Substation Gateway 4000		SG4															
Format																	
Rackmount 2U Base Unit			2														
Model																	
High performance				5													
Special/Customer Custom #1																	
NONE					0												
General Option/Customer Custom #2																	
NONE						0											
Basic Ethernet Option																	
2 Ethernet 10/100/1000 BASE-TX								A									
2 Ethernet 100 Optical, ST Connectors								B									
2 Ethernet 100 Optical, LC Connectors								C									
Basic and Expansion Flash Memory																	
BASIC 1 GB, No Expansion Flash								A									
BASIC 1 GB, Expansion 8 GB CF								B									
BASIC 1 GB, Expansion 32 GB CF								C									
BASIC 1 GB, Expansion 32 GB SSD								D									
BASIC 1 GB, Expansion 64 GB SSD								E									
Basic 1 GB, Expansion 128 GB SSD								F									
Power Supply																	
24-48 Vdc										B							
110-230 Vac, 125-250 Vdc										C							

Table 19. System Configuration Chart (continued)

Description	SMP	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Expansion Slot A																	
NONE											0						
8x Serial RS-232/485 (DB9)										A							
4x Universal Communication Port (DB25) with IRIG-B Modulated Input										B							
Expansion Slot B																	
NONE											0						
8x Serial RS-232/485 (DB9)										A							
4x Universal Communication Port (DB25) with IRIG-B Modulated Input										B							
Expansion Slot C																	
NONE												0					
8x Serial RS-232/485 (DB9)												A					
4x Universal Communication Port (DB25) with IRIG-B Modulated Input												B					
4x Ethernet 10/100/1000BASE-TX												C					
4x Ethernet Optical 100 ST Connector												D					
4x Ethernet Optical 100 LC Connector												E					
Expansion Slot D																	
NONE													0				
8x Serial RS-232/485 (DB9)													A				
4x Universal Communication Port (DB25) with IRIG-B Modulated Input													B				
4x Ethernet 10/100/1000BASE-TX													C				
4x Ethernet Optical 100 ST Connector													D				
4x Ethernet Optical 100 LC Connector													E				
Expansion Slot E																	
NONE														0			
Expansion Slot F																	
NONE															0		
Expansion Slot G																	
NONE																0	
Expansion Slot H																	
NONE																	0

Table 20. Individual Communication Module

Part Number	Description
SMP-SG-4000-1001	8x Serial RS-232/485 Ports (DB9)
SMP-SG-4000-1002	4x Universal Communication Ports (DB25) with IRIG-B Modulated Input
SMP-SG-4000-1003	4x Ethernet 10/100/1000BASE-TX
SMP-SG-4000-1004	4x Ethernet Fiber-Optic 100BASE-FX ST Connectors
SMP-SG-4000-1005	4x Ethernet Fiber-Optic 100BASE-FX LC Connectors

Quebec City
730 Commerciale Street, Suite 200
Saint-Jean-Chrysostome, Quebec
Canada G6Z 2C5
Technical support:
P: +1.800.815.2258
eassupport@cooperindustries.com

Montreal
1290 St. Denis Street, Suite 400
Montreal, Quebec
Canada H2X 3J7
Sales and marketing:
P: +1.418.834.0009
PSMO-sales@cooperindustries.com

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Eaton's Cooper Power Systems Business
2300 Badger Drive
Waukesha, WI 53188
United States
Cooperpower.com

© 2014 Eaton
All Rights Reserved
Printed in USA
Publication No. 1120-10

Eaton, Cooper Power Systems, and SMP are valuable trademarks of Eaton in the U.S. and other countries. You are not permitted to use these trademarks without the prior written consent of Eaton.
IEEE Std 1613™-2009, IEEE Std C3790.3™-2011, IEEE Std C3790.2™-2004, IEEE Std C3790.1™-2002, IEEE Std C3790™-2007, IEEE Std C37.118™-2005, IEEE Std 1588™-2008, IEEE Std 1613a™-2011 standards are trademarks of the Institute of Electrical and Electronics Engineers, Inc., (IEEE). This publication/product is not endorsed or approved by the IEEE.
Microsoft® and Windows® is either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
All other trademarks are property of their respective owners.

For Eaton's Cooper Power Systems SMP SG-4250 substation gateway information call 1-877-277-4636 or visit: www.cooperpower.com.